


P904IHK2M30NT

Induction downdraft with knobs, 90 cm 4 induction zones
Black glass with Carbonio control panel

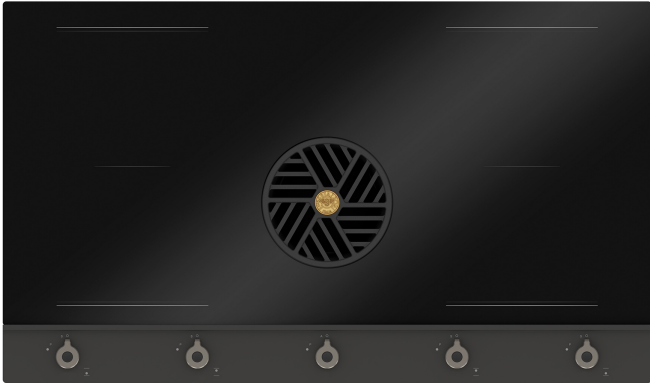

Distinctive design

The timeless elegance of black glass is enhanced by the Professional titanium knobs and carbonio accents. The knob controls make using the hob easier and more intuitive than ever.

Multi-Zone

Multi-Zone technology allows you to combine multiple cooking zones, making it easy to cook even with large pots and pans. The white LED interface enables intuitive and precise control of all cooking zones.

Automatic functions

The Temperature Manager allows you to choose from three preset temperature settings to ensure perfect results every time. The Automatic Heat-up function brings the set power up to full speed more quickly, ensuring faster cooking without burning your food.

Downdraft hood

The built-in extractor hood offers 10 speed settings and an automatic function that adjusts the extraction power to match the heat output during cooking. Fully splash-proof, it guarantees maximum protection, convenience and quiet operation.

Installation in both filtering and vented mode

The product is designed for vented out installation as standard. Two kits for filtering installation are available separately: plinth-out and back outlet. There are numerous benefits for the consumer, ensuring freedom of choice and flexibility in how the worktop is used

GENERAL SPECIFICATIONS

User interface	Professional Titanium knobs
Display	White LED
Power limitation	2 levels: 7.4 kW - 4.5 kW
Child lock	Yes
Residual heat indicator	Yes
Liquid spill safety	Yes
N cooking zones	4

INDUCTION ZONES

Cooking zone size RL [mm]	210x190
Cooking zone size RR [mm]	210x190
Cooking zone power RL [W]	2.100 W - 3.000 W Booster
Cooking zone power RR [W]	2.100 W - 3.000 W Booster
Cooking zone size FL [mm]	210x190
Cooking zone size FR [mm]	210x190
Cooking zone power FL	2.100 W - 3.000 W Booster
Cooking zone power FR	2.100 W - 3.000 W Booster

HOOD

Levels	10 speed
Energy efficiency class	A++
Extraction rate (m3/h)	640
Max sound level (dbA)	66

TECHNICAL DATA

Electrical requirements	220-240 V 50/60 HZ - 7400W 32A
Consumption [A]	32 A
Packaging dimensions (mm)	H: 310 W: 930 D: 610
Weight (kg)	Net: 20,5 kg Gross: 28.2 kg

ACCESSORIES

901677	Installation Kit Plinth-out
901678	Installation Kit filtrante back outlet


P904IHK2M30NT

Induction downdraft with knobs, 90 cm 4 induction zones
Black glass with Carbonio control panel




DIMENSIONS

Product sizes


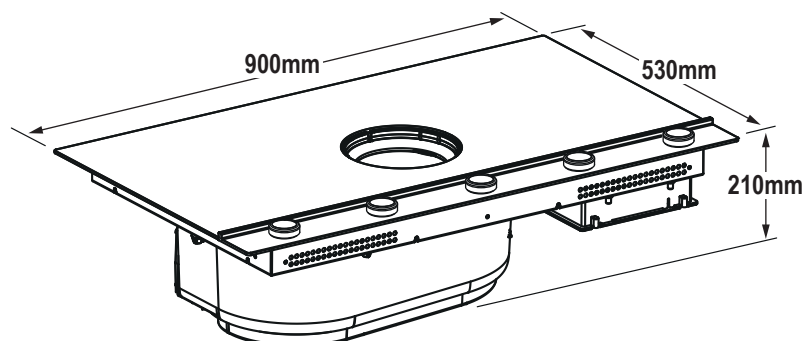


Cooking zones

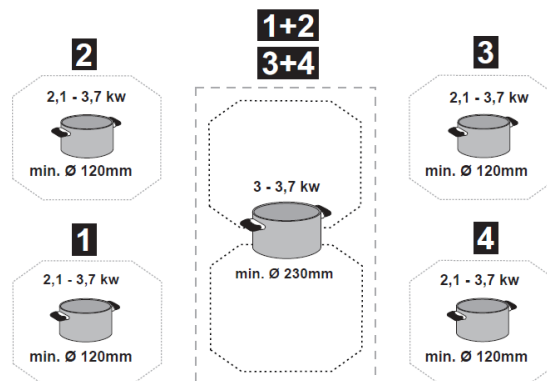


INSTALLATION

Cut-out

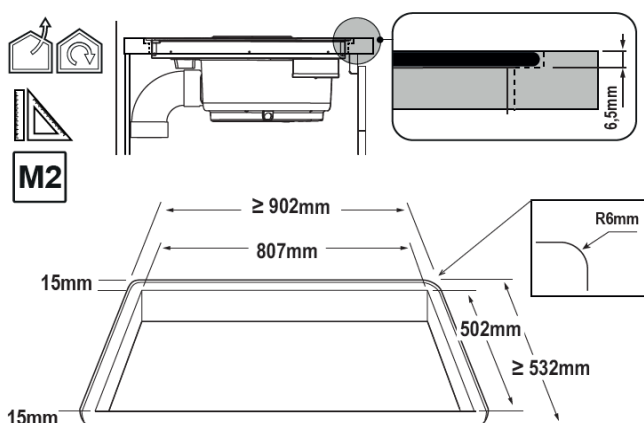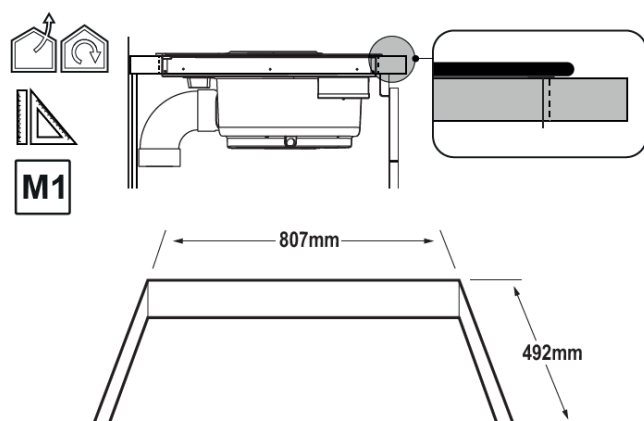


Recirculating - Back outlet

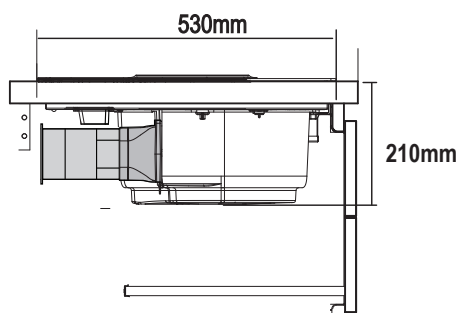

901678

Recirculating - Plinth out

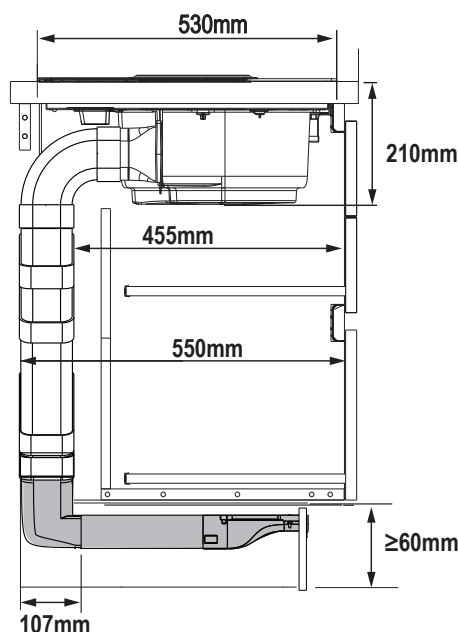

901677

NOTE

Superficie resistente alle alte temperature
Connessione Elettrica

For installation in extract mode, consult your installer regarding the optimal route.
Compatible Naber pipes

Le informazioni qui presenti fanno riferimento unicamente alle dimensioni del prodotto specificato. Alcuni dettagli estetici possono differire dal prodotto in quanto hanno il solo scopo illustrativo. Per tutte le informazioni inerenti all'installazione fare riferimento al manuale istruzioni dedicato. Il produttore si riserva il diritto di apportare modifiche a riferimenti grafici o quote senza preavviso.